


Wire-In PhotoControl GE Astrodome Replacement

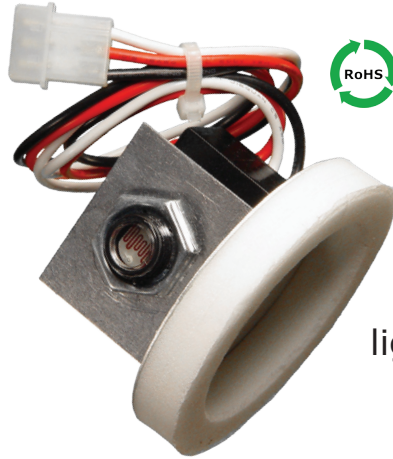

Direct replacement for
GE Astrodome® type
lighting controls

Meets or exceeds rigid
quality requirements of
applicable ANSI C136.10 and
C136.24 Standards

	5931-11
Nominal Voltage 60 Hz	120
Voltage Range	105–135
Fail Mode	On (contacts normally closed)
Switch	SPST heavy duty, thermal bi-metallic
Load Rating	1000 Watt Tungsten / 1200 VA Ballast
Operating Temperature	-40C to +70C (-40F to +158F)
Photocell	Chemically coated cadmium sulfide
Dielectric Strength	5000 Volts between current carrying parts and metal surfaces
Time Delay	30 to 45 seconds
Operating Light Levels (Standard Settings)	Turn On 2 FC ± 1 / Turn Off by 10 FC
Lead Wires Color Coded #18 AWG	Common: White Line: Black Load: Red
Lead Wire Length	Minimum 15" long, stripped 1/2"

GE Astrodome® is a registered trademark of the General Electric Company.