


Lighting Controls Accessories (continued)

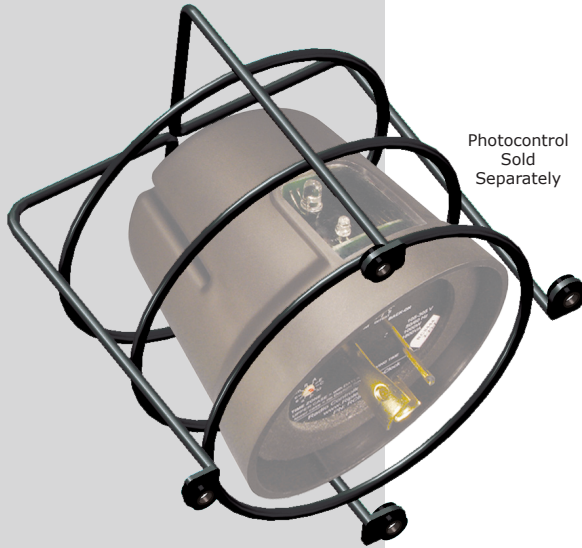

Photocontrol Sold Separately

Security Cage

Use to secure low box-mounted photocontrols from theft and vandalism

| | 5932 |
|------------------------------|---|
| Construction | 1/8" Steel Wire with Attached Rubber Washers |
| Finish | Black, Powder Coat |
| Mounting Screws (4) included | No. 8 Size, 1/2" L, Wide Washer Head Phillips Sheet Metal Screw Black Weather-Resistant Coated Steel |

Place Security Cage over the photocontrol, use screws to secure cage to the enclosure. Attached rubber washers provide a waterproof seal.



Glove Test Fixture

Use to test photocontrol operation

| | TF-2213 |
|-----------------------|--------------------------------------|
| Construction | Polypropylene Housing, |
| Nominal Voltage 60 Hz | 120 |
| Cord Connection | 3-prong grounded plug and receptacle |
| Finish | Black |

Meets or exceeds rigid quality requirements of applicable ANSI C136.10 and C136.24 Standards

Phone: (803) 939-4700
 Fax: (803) 939-4777
 Email: info@RipleyLightingControls.com

www.RipleyLightingControls.com