




**J006577--Photocontrol Test Cap**

Lightweight black vinyl cap tests the working operation of photocontrols during daylight hours. Completely eliminates direct and reflected light, enabling quick and easy testing. Not designed for use with hot sticks.

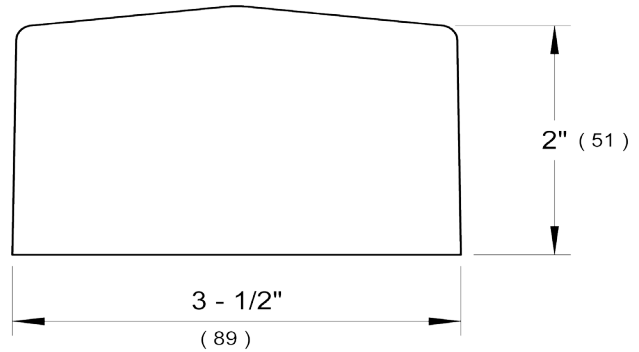

Photocontrol Sold Separately

**Reverse Operation Photocontrol Adaptor**

Reverses operation of any 120V twist lock photocontrol  
Fits any standard twistlock receptacle  
Controlled device will be on during the day — off at night

Typical applications:  
Tunnel Entrances, Greenhouse Fans and Heaters, Signs

Used in any application that needs to be turned on during daylight hours and off during the night, or Dark-Day Operation.

Phone: (803) 939-4700  
Fax: (803) 939-4777  
Email: info@RipleyLightingControls.com

[www.RipleyLightingControls.com](http://www.RipleyLightingControls.com)

	<b>5746</b>
Nominal Voltage 60 Hz	120
Voltage Range	105—135
Base	Standard 3-prong twist-lock per ANSI C136.10
Housing	3-1/2" Diameter, 4" High PVC
Circuit Breaker	10 amp, auto-reset
Load Rating	10 amp
Operating Temperature	-40C to +70C (-40F to +158F)
Photocontrol	Not included Sold separately
Dielectric Strength	5000 Volts between current carrying parts and metal surfaces